

KODAK Photo Book Paper, Kodak Alaris' latest and thinnest photographic paper, offers the highest D-max and color gamut of any Kodak Alaris silver-halide, consumer, color-negative paper. The emulsion technology enables rich, bright colors, exceptional dynamic range and detail, and spectacular print quality.

KODAK Photo Book Paper has a 169-micron thin base, compared to our world-class KODAK EKTACOLOR EDGE Paper at 210 microns base, that enables this paper to work well in double-sided photo-book assembly. Our new paper is also ideal for post cards and album cover production.

FEATURES	BENEFITS
Image Performance	
Advanced color coupler technology	<ul style="list-style-type: none"> Rich, bright, compelling colors Vibrant greens, blues, and reds High D-max for deep blacks Excellent D-for clean-looking whites
Lustre (E) surface, glossy (F) surface [†]	<ul style="list-style-type: none"> Customer-preferred surfaces for photo book applications
No backprint	<ul style="list-style-type: none"> No show-through on the image side
Excellent skin-tone reproduction	<ul style="list-style-type: none"> Natural-looking skin tones Realistic-looking prints
Wide tone scale	<ul style="list-style-type: none"> Pleasing flesh to neutral and highlights to shadows Fine detail in highlights and shadows
State-of-the-art image stability [†]	<ul style="list-style-type: none"> Bold, bright colors that last a lifetime before noticeable fading—more than 200 years before noticeable fading in most common home storage conditions
Workflow Productivity	
The latest KODAK Paper emulsion technology—thin-base, silver-halide material	<ul style="list-style-type: none"> Optimized thin base for photo books, postcards, album covers, or other applications where a thinner paper is required
Improved, robust, and economical processing performance	<ul style="list-style-type: none"> Resistant to abrasion marks during processing Minimum waste Clean-running process performance

^{*} Varies by region. Contact your supplier of KODAK PROFESSIONAL Products.

[†] Based on product application including specific light levels and temperature conditions



Important

Due to the thinness of this paper, you may experience issues with transport in printers and photobook making equipment. This will vary due to temperature, humidity, and machine conditions.

STORAGE AND HANDLING

For optimum results, store unexposed paper at 13°C (55°F) or lower in the original package. You can store unexposed paper at 24°C (75°F) and still achieve high-quality results. High temperatures or high humidity may produce unwanted changes.

To avoid moisture condensation on paper that has been refrigerated, allow it to warm up to room temperature before opening the package. For best results, remove the package from cold storage the day before you use it, or allow the paper to warm up for the appropriate time listed in the following table.

Handle paper carefully by the edges to avoid creases and fingerprints.

Minimum Warm-Up Time (Hours) at Ambient Temperature of 21°C (70°F)			
Size	From a Storage Temperature of		
	-18°C (0°F)	2°C (35°F)	13°C (55°F)
Rolls: cm x m (in. x ft)			
20.3 x 250 (8 x 820)	11	8	5.5
22.0 x 250 (8.66 x 820)	11	8	5.5
25.4 x 250 (10 x 820)	11.5	8.5	6
30.5 x 125 (12 x 410)	6	4.5	3
40.6 x 125 (16 x 410)	6	4.5	3
50.8 x 125 (20 x 410)	6	4.5	3

DARKROOM RECOMMENDATIONS

Handle this paper in total darkness. Be sure that your darkroom is lighttight. Eliminate any stray light from timers, LEDs, etc. Photo Book Paper is sufficiently sensitive to photographic process lighting (safelights) that sensitometric shifts may occur before D-min (fog) changes are seen.

Note: Using a safelight will affect your results. If absolutely necessary, you can use a safelight equipped with a KODAK 13 Safelight Filter (amber) with a 7½-watt bulb. Keep the safelight at least 4 feet (1.2 metres) from the paper. Keep safelight exposure as short as possible. Run tests to determine whether safelight use gives acceptable results for your application. For information on safelight testing, see Kodak Alaris Publication No. K- 4, How Safe is Your Safelight?

EXPOSURE

Digital Exposure

You can expose KODAK Photo Book Paper in many types of digital printers. For digital printing instructions, see Kodak Alaris Publication CIS-288, Calibrating KODAK Photo Book Paper (available at www.kodakalaris.com/go/colorpapers).

LATENT-IMAGE KEEPING

For best results, process the paper on the same day that you expose it. (If latent-image shifts occur, minimize them by keeping the time between exposure and processing as consistent as possible.)

PROCESSING

Use KODAK EKTACOLOR Chemicals for Process RA-4 or KODAK EKTACOLOR SM Chemicals for Process RA-2SM. For FUJI FRONTIER Processors, use KODAK EKTACOLOR Processing Cartridge 111 and KODAK Rinse Tablets. Use KODAK Control Strips, Process RA-4 to monitor your process.

For more information on processing chemicals, visit www.kodakalaris.com/go/colorpapers.

Use a maximum drying temperature of 96°C (205°F).

VIEWING

Evaluate prints under light of the same color and brightness that you will use to view the final prints. For an average condition, use a light source with a color temperature of 5000 ± 1000 K, a Color Rendering Index (CRI) of 85 to 100 (an index of 90 or higher is desirable), and an illuminance up to 500 lux. Fluorescent lamps such as a cool white deluxe lamp (made by several manufacturers) meet these conditions. You can also use a mixture of fluorescent and incandescent lamps. For each pair of 40-watt cool white deluxe lamps, use a 75-watt frosted tungsten bulb.

PRINT FINISHING

Dust Spotting

Use KODAK Liquid Retouching Colors to correct dust spots on prints made with this paper. To apply dyes, follow this procedure:

1. If necessary, clean the surface of the print by buffing it with a tuft of cotton before you start retouching. Be careful not to scratch the surface. Protect the print from fingerprints and perspiration by wearing cotton gloves (e.g., KODAK Cotton Gloves).
2. Transfer a small amount of the dye(s) you need to a palette.
3. If necessary, add a touch of neutral dye to the puddle of pure colored dye. The neutral dye will reduce the brilliance of the pure colors by adding density. For good control, keep the dilutions weak by adding a little distilled water. This allows you to build up the dye gradually on the print. It is easier to add dye gradually than to remove it if you apply too much.

Note: If the liquid dyes on your palette dry out, you can add water to dilute them again.

4. Pick up a small amount of dye with your brush, and stroke the brush on newsprint or a paper towel to blot it thoroughly. Too much moisture can cause opalescence, or a cloudy look, on the print. Rotate the tip on the newsprint to form a good point. Do not use your tongue or lips to form a tip.
5. Retouch the print with light strokes of the brush; be sure to keep the dye within the area of the spot. Avoid spilling over into the surrounding area. Any overlapping will result in a dark ring around the spotted area.
6. If you apply too much color, blot it quickly with newsprint or you will have too much density in the spot. If too much dye penetrates the emulsion, you can remove it with a 5-percent clear ammonia-water solution. (You can make a 5-percent solution by mixing 5 parts of 28-percent liquid ammonium hydroxide with 23 parts water.) Apply the solution with a tuft of cotton, rubbing it with a circular motion. Be sure to apply it only to the area where you want to remove the dye. Then swab the area with clean water-dampened cotton. Repeat if necessary with a fresh tuft of cotton. Be sure to remove all of the ammonia. Allow the area to dry thoroughly before you resume retouching. For best results, remove unwanted dye quickly.

STORAGE AND DISPLAY OF PRINTS

KODAK Photo Book Paper has been formulated to provide improved dye stability and print longevity for prints displayed under typical home lighting conditions (i.e., 120 lux for 12 hours a day), and typical home dark storage conditions (i.e., 20 to 23°C [68 to 73.4°F] and 50% relative humidity). Product modifications have provided an improvement in the fade neutrality when compared with previous papers.

Despite the improvements in print longevity and fade neutrality, photographic dyes, like all dyes, can change with time and exposure to sunlight, ultraviolet radiation, excessive heat, and high humidity. To help prevent changes in photographic dyes, follow these guidelines:

- Illuminate prints with tungsten light whenever possible.
- Display prints in the lowest light level consistent with your viewing needs.
- If a print is exposed to direct or indirect sunlight or fluorescent light, use an ultraviolet-absorbing filter (such as glass) between the light source and the print.
- Keep the temperature and humidity as low as possible.
- For prints displayed behind glass, maintain a slight separation between the prints and the glass.
- Use album materials described in Kodak Alaris Publication No. E-30, Storage and Care of KODAK Photographic Materials—Before and After Processing.


Mounting/Laminating

Prints can be mounted using a contact type adhesive or cement for cold mounting. In addition, prints can be mounted or laminated using pressure sensitive materials with a roller mounting or laminating system.


If the prints are to be displayed behind glass, maintain a slight separation between the print and the glass.

Mounting or laminating prints at high temperatures is not recommended.


CURVES

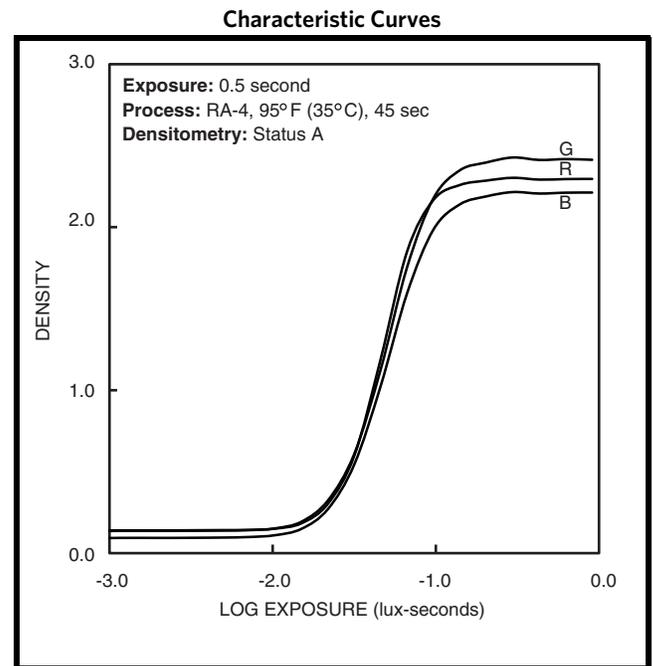

NOTICE: The sensitometric curves and data in this publication represent product tested under the conditions of exposure and processing specified. They are representative of production coatings, and therefore do not apply directly to a particular box or roll of photographic material. They do not represent standards or specifications that must be met by Kodak Alaris. The company reserves the right to change and improve product characteristics at any time.

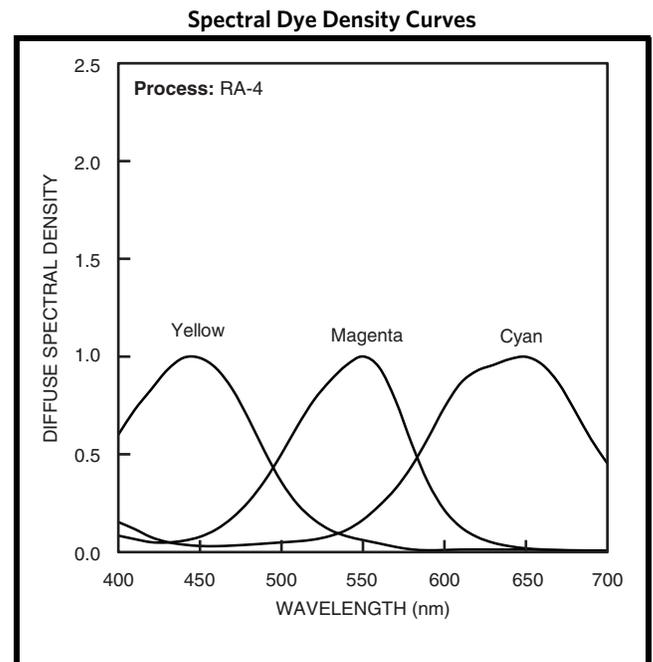

Spectral Sensitivity Curves

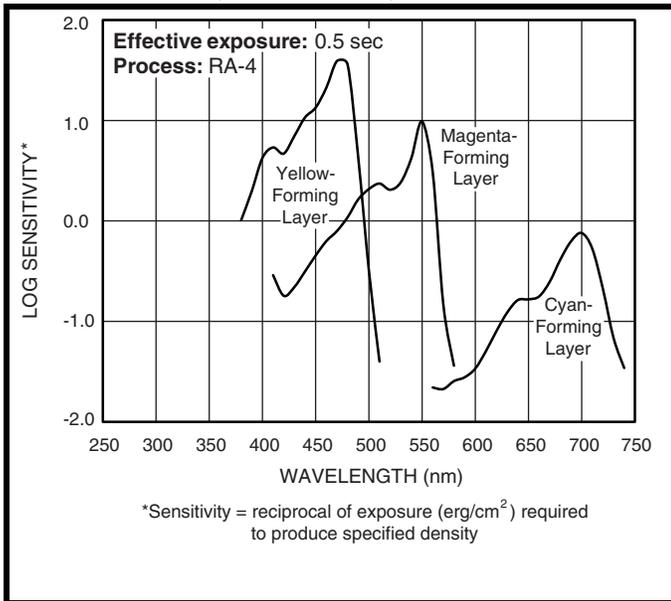

SIZES AVAILABLE

KODAK Photo Book Paper is available in a variety of roll sizes. Sizes and catalog numbers may differ from country to country. See your dealer who supplies Kodak Alaris Products.

MORE INFORMATION

Kodak has publications to assist you with information on KODAK Papers and Chemicals. To learn more, visit www.kodakalaris.com/go/colorpapers.

© 2017 Kodak Alaris Inc.

TM/MC/MR: Edge

The Kodak, Kodak Professional, and Ektacolor Trademarks are used under license from Eastman Kodak Company.

KODAK Photo Book Paper
KODAK Publication No. E-7027
Revised 12-17